






Series 132

XTS

N

2800rpm

ø 24mm

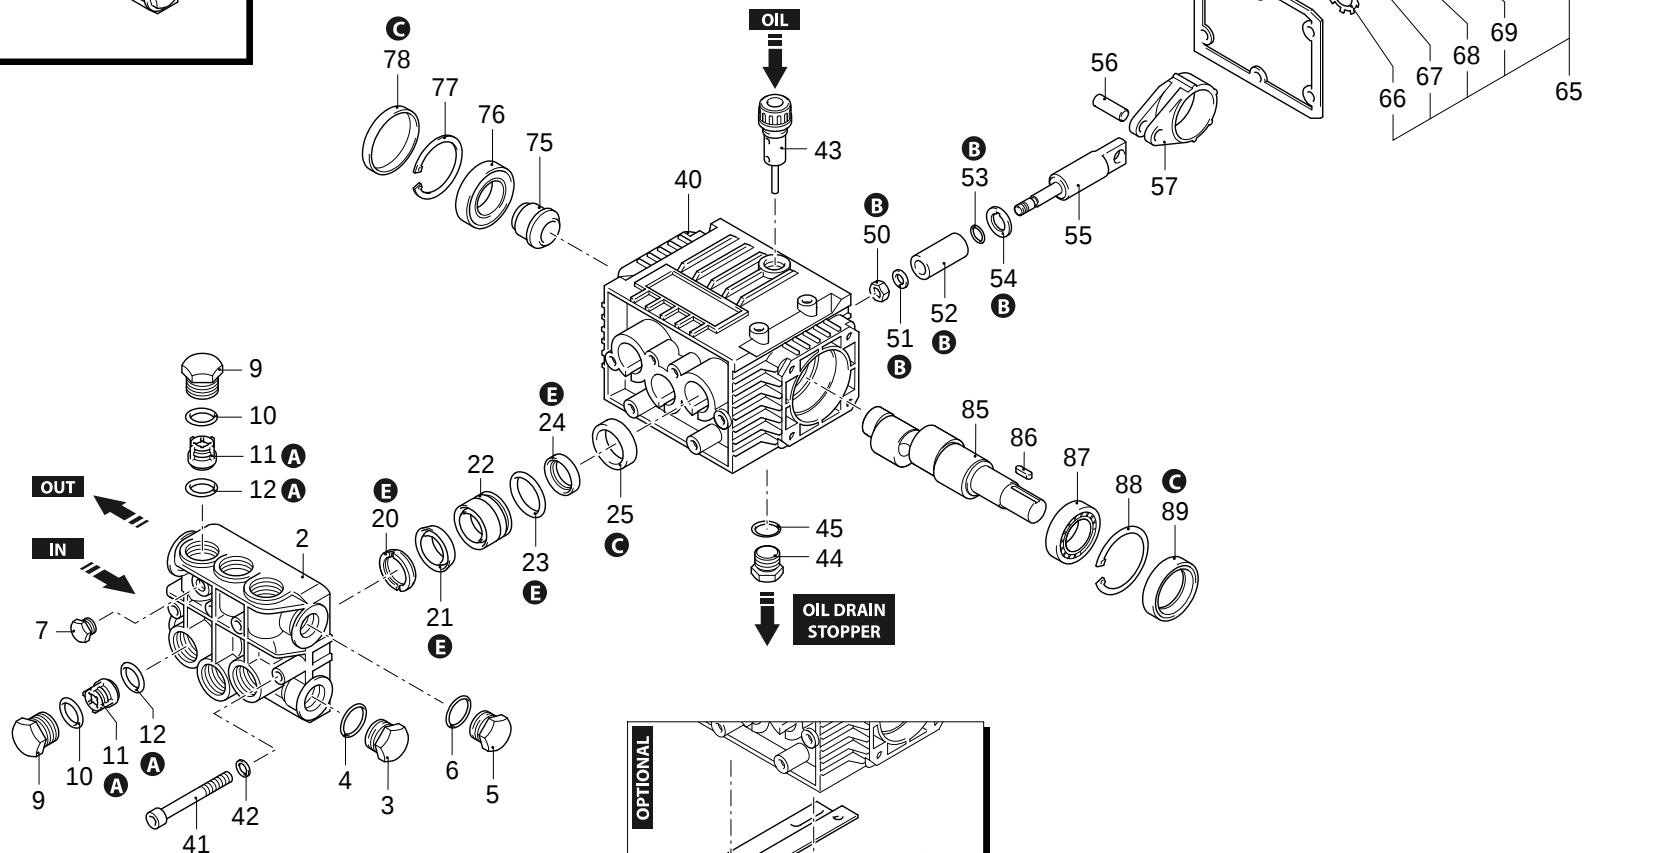

AR_s132-01_015



Series 132

XTS

N

2800rpm

ø 24mm

P	Code	Description		Q	Assembly prescription	Validity	P	Code	Description		Q	Assembly prescription	Validity
1	1269221	Head assembly	Ø 15	1			75	1320330	Bushing		1		
2	1320022	Head		1			76	1320370	Bearing		1		
3	820361	Plug	1/2" G brass	1	C=40Nm		77	1260790	Ring	seeger Øi 52	1		
4	180101	O-ring	Ø 17,5x2	1	Lubricate with grease Molykote PG54		78	1266740	Cover		1		
5	1980740	Plug	3/8" G brass	1	C=20Nm		85	1260190	Shaft	5 marked	1		
6	740290	O-ring	Ø 14x1,78	1	Lubricate with grease Molykote PG54		86	1380520	Key		1		
7	620301	Plug	1/8" G	1	Loxeal 55-14		87	1320370	Bearing		1		
9	1260162	Plug		6	C=34Nm		88	1260790	Ring	seeger Øi 52	1		
10	960160	O-ring	Ø 17,86x2,62	6	Lubricate with grease Molykote PG54		89	1260750	Ring	seal	1	Assemble with tool [1941990]	
11	1269050	Complete valve		6			98	1263890	Foot		2		
12	880830	O-ring	Ø 15,54x2,62	6	Lubricate with grease Molykote PG54		99	1260470	Screw	TE M8x10	4	C=24Nm	
20	1520120	Ring	support Ø 15	3			A	1864	Valve kit		1		
21	1271650	Water seal	Ø 15	3	Lubricate with grease Molykote PG54		B	2628	Piston kit	Ø 15	1		
22	1260151	Piston guide	Ø 15	3			C	1872	Oil seal kit		1		
23	1260420	O-ring	Ø 26,70x1,78	3	Lubricate with grease Molykote PG54		E	1866	Water seal kit	Ø 15	1		
24	1260440	Water seal	Ø 15	3	Lubricate with grease Molykote PG54		E	2029	Water seal kit	Ø 15 Viton	1		
25	1260460	Oil seal		3									
40	1320010	Pump body		1									
41	1322730	Screw	TCEI M6x60	6	C=15Nm								
42	1381550	Washer		6									
43	880130	Oil plug	with oil dipstick	1									
44	1980740	Plug	3/8" G brass	1	C=20Nm								
45	740290	O-ring	Ø 14x1,78	1	Lubricate with grease Molykote PG54								
46	1260040	Oil seal		1									
47	1260760	Screw	TCEI M5x20	6	C=5,4Nm								
50	1260110	Nut	M8	3	C=12Nm / Loxeal 55-14								
51	1260100	Washer		3									
52	1260120	Piston	Ø 15	3									
53	480480	O-ring	Ø 4,48x1,78	3									
54	1260091	Plate		3									
55	1260070	Piston	guide	3									
56	1260080	Pin		3									
57	1320140	Connecting-rod	bronze	3									
65	1329010	Cover	complete	1									
66	1260430	Ring		1									
67	1780690	Plate		1									
68	1260250	Level gauge		1									
69	1140450	O-ring	Ø 20,24x2,62	1	Lubricate with grease Molykote PG54								

Revision: 1

Oil type: SAE 15W40

Validity: < XX/YY = From week/year

Date: 05/06/2026

Oil quantity: 0,280 Kg

C= Tightening torque (Tolerance +0 ÷ -10%)

* = Not present for electric pump

7415 - XTS 13.15 N